


# IES-2208CA

## 8 10/100TX + 2 10/100/1000T/Dual Speed SFP Combo

### Industrial Managed Switch

- *UL Class I Division II for Group A,B,C and D certified*
- *ATEX Directive 94/9/EC certified (-ATEX model)*
- *Pro-Ring2se for self-heal ring<20ms*
- *Support Advanced SNMP including QoS, IGMP query & source only, QinQ, DDM\*\*\*, CPU load monitoring*
- *Factory Default Button to restore setting*

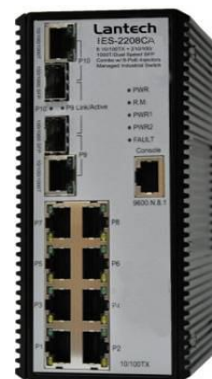

## OVERVIEW

The Lantech IES-2208CA is an 8-port 10/100BaseTX + 2-port 10/100/1000T/Dual Speed SFP Combo industrial switch with Pro-Ring2se self-recovery scheme in 20ms. The SFP connection is suitable with 100M or 1000M Dual Speed. The advanced SNMP management features include QoS for 4 queues, 802.1q VLAN, IGMP snooping, query and source only for multicast IP surveillance, DDM\*\*\* as well as Web Ping, CPU load monitoring, SNMP and SMTP etc.

The Pro-Ring2se self-recovery scheme can recover Ring network in less than 20ms with single ring up to 50 switches with one step setup. Lantech IES-2208CA builds all the important management features required in large network like DHCP Client/Server, 802.1X authentication, IGMP Query / Snooping, advanced QoS and QinQ. The exclusive source only function is good for reverse multicast flow which can automatically select the query (router port) in a ring for IP surveillance application. It also supports Ping commands via Web to detect whether a specific device is still connected for easy trouble-shooting.

The IES-2208CA has the relay contact that is able to connect with alarm system and send Email and SNMP trap alert in case of power or port failure. It also has the built-in factory reset button can restore all setting back to factory default.

The IES-2208CA is designed to meet with critical network environment with IP 30 enclosure and test under extensive Industrial EMI and Safety standards. With UL Class I Division II / ATEX Directive 94/9/EC approval, the IES-2208CA can be implemented in hazardous or explosive condition without accelerating the damage. It's the best choice for inflammable environment where the liquid, gas and vapor etc might present the hazardous condition which generally to be find in mining, oil & gas, chemical, processing automation areas. It's also suitable for surveillance, factory automation, transportation, telecom / ISP outside terminal, heavy industrial factory and other factory assembly lines.

The -E / -ATEX model can be used in extreme environments with an operating temperature range of -40°C to 75°C.

## FEATURES & BENEFITS

- Pro-Ring2se for self-recovery scheme in less than 20ms for single-ring with one setup
- SFP slot supports 100/1000 Dual Mode with DDM\*\*\* for SFP diagnostic and monitoring
- Back-plane (Switching Fabric): 5.6Gbps
- 1Mbits Packet Buffer / 8K MAC address table
- UL Class I Division II for Group A,B,C and D certified
- ATEX Directive 94/9/EC certified (-ATEX model)
- IP-30 Protection with DIN rail and wall mount design
- Provides EFT protection 3000 VDC for power line
- Supports 6000 VDC for ESD protection
- Support CPU load monitoring and Web Ping to check if the connected device is alive
- IEEE 802.1d Spanning Tree & IEEE 802.1w RSTP
- IGMP with Snooping and Query mode for Multi Media Application
- IGMP source only for reverse multicast application
- Static Multicast Route for non-IGMP application
- Port Based VLAN, 802.1Q Tag VLAN, GVRP, QinQ
- Port Trunk with LACP
- Supports IEEE 802.1ab LLDP
- Supports IEEE 802.1p CoS, 4 priority queues per port

Datasheet Version 1.8


- Port base, Tag Base and Type of Service Priority
- Supports Ingress Packet Filter and Egress Rate Limit
- Supports Broadcast/Multicast Packet Filter Control
- Port Mirror: Monitor traffic in switched networks
  - TX, RX, Both of TX and RX Packet
- System Log Server/Client
- SMTP e-mail Alert up to 6 emails
- Security
  - Port Security: MAC address entries/Filter
  - IP Source Guard: IP address security management to

prevent unauthorized intruder

· Login Security: IEEE802.1X/RADIUS/SSH\* / SSL\*

- SNMP Trap
  - Device cold start, Power status, Authentication failure, Port Link up/Link down
- Relay Alarm Output System Events
- TFTP & Web Firmware Update & System Configure Restore/Backup;
- Factory reset bottom can restore all setting back to factory default

## DIMENSIONS (unit=mm)

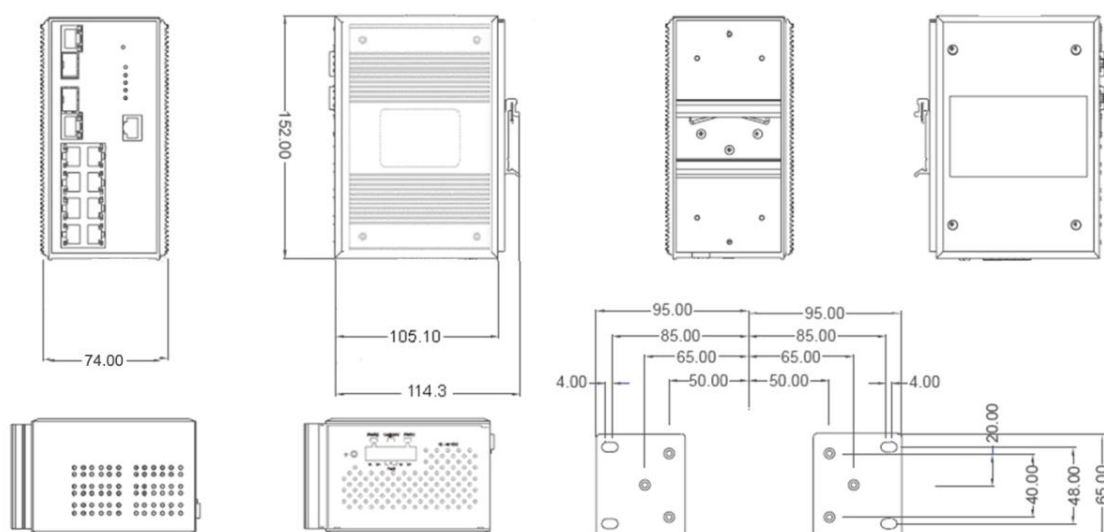

## SPECIFICATION

Hardware Specification		Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 1000Base-TX: 2-pair UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m)
IEEE Standards	IEEE802.3 10Base-T Ethernet IEEE802.3u 100Base-TX IEEE802.3ab 1000Base-T IEEE802.3z Gigabit fiber IEEE802.3x Flow Control and Back Pressure IEEE802.3ad Port trunk with LACP IEEE802.3af Power over Ethernet IEEE802.1d Spanning Tree IEEE802.1w Rapid Spanning Tree IEEE802.1p Class of Service IEEE802.1Q VLAN Tag IEEE802.1x User Authentication (Radius) IEEE802.1ab LLDP	Optical Fiber	<b>1.25Gbps:</b> Multi mode: 0 to 550 m, 850 nm (50/125 μm); 0 to 2 km, 1310 nm (50/125 μm) Single mode: 0 to 10 km/ 30 km/ 40 km, 1310 nm (9/125 μm); 0 to 50 km/ 60 km/ 80km/ 120 km, 1550 nm (9/125 μm) <b>125Mbps:</b> Multi mode: 0 to 2 km/ 5 km, 1310 nm (62.5/125 μm) Single mode: 0 to 30 km, 1310 nm (62.5/125 μm) <b>WDM 1.25Gbps:</b> Single mode: 0 to 10 km/ 20 km/ 40 km/ 60 km, 1310 nm (9/125 μm); 0 to 80 km, 1490 nm (9/125 μm); 0 to 10 km/ 20 km/ 40 km/ 60 km/ 80 km, 1550 nm (9/125 μm) <b>WDM 125Mbps:</b> Single mode: 0 to 20 km/ 40 km/ 60 km/ 80 km, 1310 nm (9/125 μm); 0 to 20 km/ 40 km/ 60 km/ 80 km, 1550 nm (9/125 μm)
Switch Architecture	Back-plane (Switching Fabric): 5.6Gbps	Protocol	CSMA/CD
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Fiber Ethernet port	LED	<b>Per unit:</b> Power (Green), Power 1 (Green), Power 2 (Green), Fault (Yellow), Master (Green) <b>8 port 10/100:</b> Link/Activity (Green), Full duplex/Collision (Yellow)
Packet Buffer	1Mbits		
MAC Address	8K MAC address table		
Flash ROM	4Mbytes		
DRAM	32Mbytes		
Connectors	10/100TX: 8 x ports RJ-45 with Auto MDI/MDI-X function 10/100/1000T/SFP Combo port: 2 x RJ-45 + 2 x 100/1000 SFP socket with DDM RS-232 connector: RJ-45 type		

	<b>SFP port:</b> LNK/ACT(Green), 1000T: LNK/ACT(Green), 1000M(Green)	Class of Service	Supports IEEE802.1p class of service, per port provides 4 priority queues
Power Supply	12V~48VDC(9V~56VDC);Redundant power connector removable terminal block for master and slave power	Port Security	Supports 100 entries of MAC address for static MAC and another 100 for MAC filter
Overload current protection	Present	Port Mirror	Supports 3 mirroring types: "RX, TX and Both packet"
Operating Humidity	5% ~ 95% (Non-condensing)	IGMP & Static Multicast Forwarding	Supports IGMP snooping v1,v2 and Query 256 static multicast forwarding groups for non-IGMP cameras IGMP source to auto learn multicast stream and forward the traffic only to multicast router ports
Operating Temperature	Standard: -20°C~60°C / -4°F~140°F Wide Operating Temperature for -E model & -ATEX model: -40°C~75°C / -40°F~167°F	IP Source Guard	Supports 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder.
Storage Temperature	-40°C~85°C / -40°F~185°F	Login Security	Supports IEEE802.1X Authentication/RADIUS/Telnet
Case Dimension	IP-30, 74(W) x 114 (D) x 152 (H) mm	Flow Control	Supports Flow Control for Full-duplex and Back Pressure for Half-duplex
Weight	850 g	System Log	Supports System log record and remote system log server
Fan Number	0	SMTP	Supports SMTP Server and 6 e-mail accounts for receiving event alert
Installation	Wall mount or DIN-type cabinet install	SNTP	Supports SNTP to synchronize system clock to Internet
EMI & EMS	FCC Class A, CE EN61000-4-2, CE EN61000-4-3, CE EN61000-4-4, CE EN61000-4-5, CE EN61000-4-6, CE EN61000-4-8, CE EN61000-4-11, CE EN61000-4-12, CE EN61000-6-2, CE EN61000-6-4	Bandwidth Control & Storm Control	Support ingress packet filter and egress packet limit The egress rate control supports all of packet type and the limit rates are 100K~102400Kbps(10/100), 100K~256000Kbps(1000) Ingress filter packet type combination rules are Broadcast/Multicast/Unknown Unicast packet, Broadcast/Multicast packet, Broadcast packet only and all of packet. The packet filter rate can be set from 100K~102400Kbps(10/100), 100K~256000Kbps(1000)
Safety	UL UL Class I Division II for Group A,B,C and D hazardous location ATEX Directive 94/9/EC (-ATEX model)	Relay Alarm	Provides one relay output for port breakdown, power fail alarm. Alarm Relay current carry ability: 1A @ DC24V
Stability Testing	IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)	SNMP Trap	1. Cold start 2. Link down 3. Link up 4. Authorization fail
Power Consumption	9.86 W at full load	DHCP	Provides DHCP Client/ DHCP Server/ Port and IP Binding
MTBF	281,224 hrs	DNS	Provide DNS client feature and support Primary and Secondary DNS server.
Warranty	5 years	Firmware Update	Supports TFTP/Web firmware update, TFTP backup and restore. White list for TFTP upgrade and configuration editable file
<b>Software Specification</b>		Factory reset & Watchdog design	Factory reset bottom can restore all setting back to factory default and Watchdog design to automatically reboot switch when CPU loading is too high
Management	SNMP v1 v2c, v3/ Web/Telnet/CLI	ifAlias	Each port allows importing 128bits of alphabetic string of word on SNMP and CLI interface
SNMP MIB	RFC 1215 Traps MIB, RFC 1213 MIBII, RFC 1157 SNMP MIB, RFC 1493 Bridge MIB, RFC 2674 VLAN MIB, RFC 1643 EtherLike, RFC 1757 Rmon, RSTP MIB, Private MIB, LLDP MIB		
System Information	Show detail info incl.Name, Version CPU load monitoring for every 1,5,15 minutes Display network parameters incl. Mac, IP, Gateway, Netmask Allow adding port description		
Pro-Ring2se	Pro-Ring 2se system Topologies for network recovery in less than 20ms up to 50 switches.  Note:Pro-Ring2s is not compatible with Pro-Ring2s/Pro-RingII/Pro-Ring I; 20ms recovery is on fiber port.		
Port Trunk with LACP	LACP Port Trunk: 4 Trunk groups/Maximum 4 trunk members		
LLDP	Supports LLDP to allow switch to advise its identification and capability on the LAN		
Spanning Tree	Supports IEEE802.1d Spanning Tree and IEEE802.1w Rapid Spanning Tree		
Quality of Service	The quality of service determined by port, Tag and IPv4 Type of service, IPv4/IPv6 Different Service		

\*Future Release  
 \*\*Optional  
 \*\*\*Optional DDM SFP required

## ORDERING INFORMATION

- **IES-2208CA.....P/N: 8350-451**  
8 10/100TX + 2 10/100/1000T/Dual Speed SFP Combo Managed Industrial Switch; -20°C to 60°C
- **IES-2208CA-E.....P/N: 8350-452**  
8 10/100TX + 2 10/100/1000T/Dual Speed SFP Combo Managed Industrial Switch; -40°C to 75°C
- **IES-2208CA-ATEX.....P/N: 8350-452-ATEX**  
8 10/100TX + 2 10/100/1000T/Dual Speed SFP Combo Managed Industrial Switch; -40°C to 75°C; ATEX Directive 94/9/EC

## OPTIONAL ACCESSORIES

### DIN Rail Power

- **AD1048-24FS** 24VDC, 2A, Wide AC Input, Convection Cooled, DIN Rail or Wall Mounted, RoHS, Operating Temp. -20°C~50°C (ambient, derating each output at 2.5% per degree from 50°C ~ 75°C, which means the output is 18 Watts at 75°C.)
- **AD1024-24F** 24VDC, 1A, Wide AC Input, Convection Cooled, DIN Rail or Wall Mounted, RoHS, Operating Temp. -20°C~50°C (ambient, derating each output at 2.5% per degree from 50°C ~ 75°C, which means the output is 9 Watts at 75°C.)
- **AD1240-48S** 48VDC, 5A, Wide AC Input, Build-in fan Cooled, DIN Rail or Wall Mounted, RoHS, Operating Temp. -20°C~50°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)
- **AD1120-48F** 48VDC, 2.5A, Wide AC Input, Build-in fan Cooled, DIN Rail or Wall Mounted, RoHS, Operating Temp. -20°C~50°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C)

### Mini GBIC (SFP)

- |                    |  |                   |  |
|--------------------|--|-------------------|--|
| ■ <b>8330-162</b>  | MINI GBIC 1000SX (LC/0.5km) Transceiver      | ■ <b>8330-188</b> | LTSFP-1000BX-10KM Transceiver (WDM 1310) |
| ■ <b>8330-163</b>  | MINI GBIC 1000SX2 (LC/2km) Transceiver       | ■ <b>8330-189</b> | LTSFP-1000BX-10KM Transceiver (WDM 1550) |
| ■ <b>8330-165</b>  | MINI GBIC 1000LX (LC/10km) Transceiver       | ■ <b>8330-186</b> | LTSFP-1000BX-20KM Transceiver (WDM 1310) |
| ■ <b>8340-0591</b> | MINI GBIC 1000LHX (LC/40km) Transceiver      | ■ <b>8330-187</b> | LTSFP-1000BX-20KM Transceiver (WDM 1550) |
| ■ <b>8330-166</b>  | MINI GBIC 1000XD (LC/50km) Transceiver       | ■ <b>8330-180</b> | LTSFP-1000BX-40KM Transceiver (WDM 1310) |
| ■ <b>8330-169</b>  | MINI GBIC 1000XD (LC/60km) Transceiver       | ■ <b>8330-182</b> | LTSFP-1000BX-40KM Transceiver (WDM 1550) |
| ■ <b>8330-167</b>  | MINI GBIC 1000ZX (LC/80km) Transceiver       | ■ <b>8330-181</b> | LTSFP-1000BX-60KM Transceiver (WDM 1310) |
| ■ <b>8330-170</b>  | MINI GBIC 1000EZ (120km) Transceiver         | ■ <b>8330-183</b> | LTSFP-1000BX-60KM Transceiver (WDM 1550) |
| ■ <b>8330-168</b>  | MINI GBIC 1000T (100m) Transceiver           | ■ <b>8330-184</b> | LTSFP-1000BX-80KM Transceiver (WDM 1490) |
| ■ <b>8330-061</b>  | 100Base LX 30KM, Single-mode, LC Transceiver | ■ <b>8330-185</b> | LTSFP-1000BX-80KM Transceiver (WDM 1550) |
| ■ <b>8330-060</b>  | 100Base FX 2KM, Multi-mode, LC Transceiver   |                   |  |

All part no. with D are with DDM function

Lantech Communications Europe GmbH

[www.lantechcom.eu](http://www.lantechcom.eu)  
[info@lantechcom.eu](mailto:info@lantechcom.eu)

© 2013 Copyright Lantech Communications Global Inc. all rights reserved.  
 The revise authority rights of product specifications belong to Lantech Communications Global Inc.  
 Lantech may make changes to specification and product descriptions at anytime, without notice.